

Halcyon AMH40


undercounter

GLASSWASHER

halcyon®

Halcyon **AMH40** Features

- **1 year warranty**
- Accurate detergent and rinse aid peristaltic dosing pumps
- Dosing set up by fascia controls
- Easy clean parallel wash and rinse arm assembly
- Optional surface scrap tray filters
- Large three button control

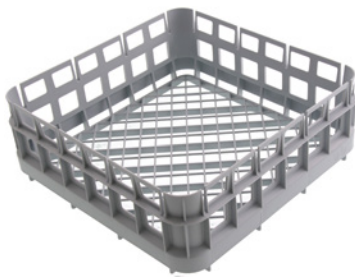

Two 390 x 390mm open cup/ glass racks supplied as standard – capable of holding 16 pint glasses.

Additional racks can be purchased



Drain pump version
available: **AMH40 D**

Distributor:

KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP
Tel: 0333 123 2450
sales@kidcateringequipment.com

Halcyon AMH40

undercounter GLASSWASHER



halcyon®

Technical Data

Dimensions (W x D x H)	mm	440 x 540 x 670 + Feet
Feet height	mm	10-20
Rack size	mm	390 x 390
Maximum useable height	mm	300
Door opening	mm	320
Theoretical productivity	Racks/h	30
Effective productivity	Racks/h	24*

*Allowing 30 seconds for reloading


Cycle times may vary depending on local conditions/services

Wash tank element	kW	1.4
Boiler element	kW	2.6
Wash pump	kW	0.18
Tank capacity	L	8
Noise emission	dB(A)	≤ 70

Packaging Specs

Gross weight	Kg	34
Cubic volume	m³	0.25
Dim. (W x D x H)	mm	520 x 630 x 830

Installation Diagram – All services must be within 1 meter

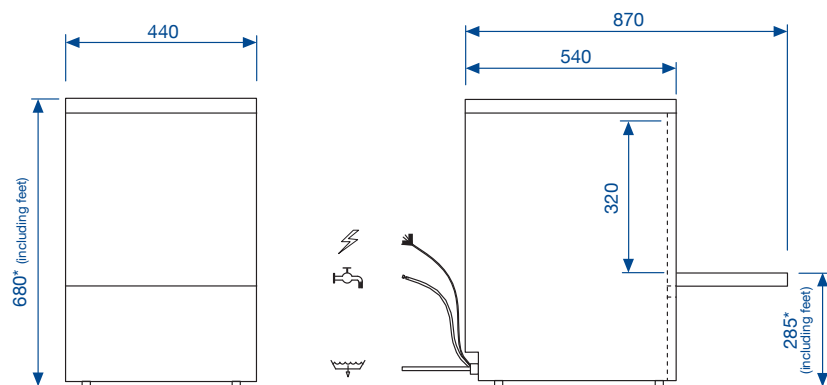

*Height-adjustable feet + 10mm

Power Supply

Installed power	AMP	kW
230V – 50Hz – 1N	13*	2.8

*Supplied with 13A moulded plug and lead

-  **Power**
-  **Water supply 2 – 4 bar**
-  **Gravity drain**

Water Connection

Inlet water pressure	Bar	2 to 4
Flow rate L/Min	L/Min	6
Water inlet temp	°C	10 to 50
Water connection	BSP	¾"
Waste connection	Ø	Int 16.8/ext 21.6

Cycle Information

Number of standard cycles		1
Standard cycles times	Sec	120
Special cycle		N/A
Self-cleaning cycle		Partial
Water consumption per cycle	L	2.2
Wash temperature	°C	60
Rinse temperature	°C	65

Distributor:

KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP
Tel: 0333 123 2450 sales@kidcateringequipment.com