



Evolution | pass through + heat recovery



23

dishwashers

**EVOLUTION
2135 WS HR**
(shown with tabling –
not included)

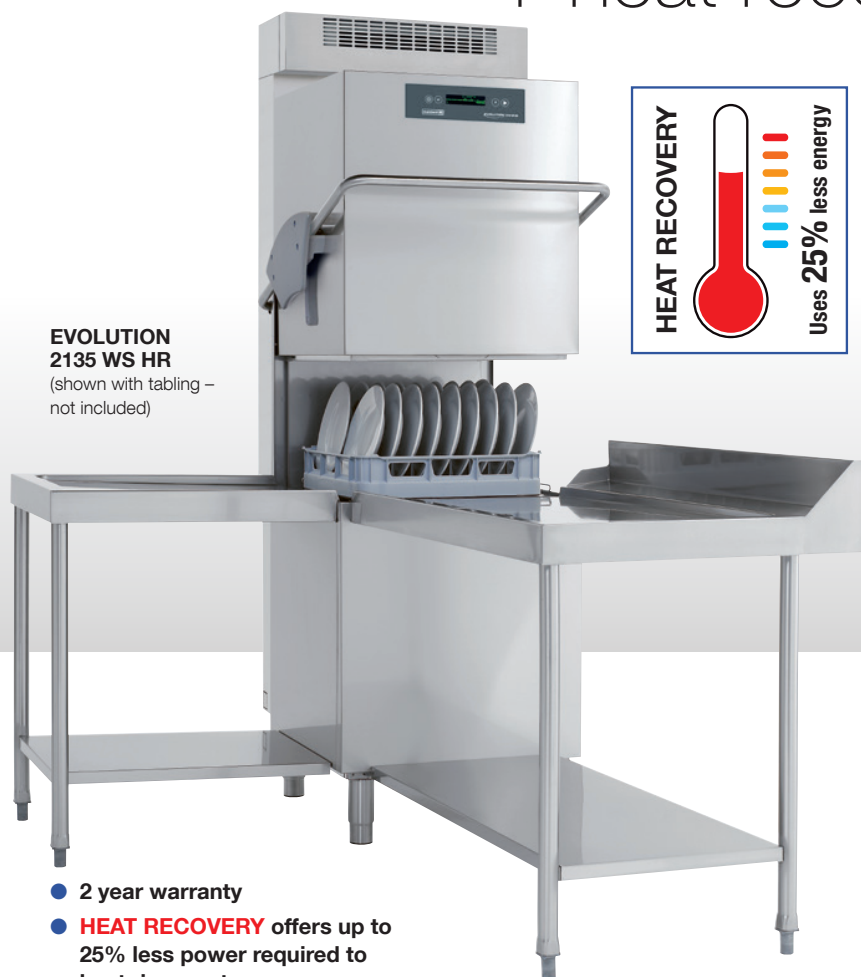

- **2 year warranty**
- **HEAT RECOVERY** offers up to 25% less power required to heat rinse water
- **HR module supplied separately with simple bolt on instructions**
- **Reduces need for extraction hood and improves working environment**
- **NEW** Evolution 2035 WS HR with heat recovery, drain pump, break tank & internal continuous water softener with increased range of water hardness settings as standard
- **NEW** Four button control fascia with special programmes button, operational self-diagnostics & alarms menu
- **NEW** improved wash action from quick release parallel wash & rinse arm design
- **NEW** stainless steel scrap tray filters supplied as standard
- **NEW** improved triple wash tank filtration system
- Three standard cycle time options with an extensive range of special cycles
- Cycle times can be tailored to site requirements

- Reduced water consumption
- Comprehensive automatic self-cleaning at end of service
- Selectable energy saving mode
- Selectable thermostop ensures optimum rinse temperatures
- Fully double skinned body & hood construction minimising both acoustic output and reduced heat-loss
- Easy lift super glide hood system
- Patented dual flow wash pump – reducing power consumption whilst retaining wash efficiency
- Moulded wash tank for easy cleaning
- Accurate detergent & rinse aid peristaltic dosing pumps as standard
- Supplied with one pegged rack, one open cup/glass rack & cutlery insert


The easy to use soft touch keys complement a large backlit polychromatic LCD display.

Unlike other dishwashers on the market, it is not just a button; the entire screen changes colour according to the operating status of the machine and the current stage of the wash cycle; this makes it easy to read and interpret even from a distance.

RED = in Alarm




BLUE = in Cycle



YELLOW = is Heating, but will still function



GREEN = Ready to go



Technical

- Standard voltage 230V – single phase (can be supplied for 3 phase – please specify at time of order)
- Suitable for cold water supply only, typically at 2 to 4 bar dynamic supply pressure, refer to specification sheets for individual requirements.

Cannot be used with hot water supply.

- Wash temperature 60°C (adjustable)
- Rinse temperature 82°C (adjustable)
- Cycle times between 70 & 240 secs

Requires a waste up stand for correct operation.

Restrictive waste connections should be avoided for all installations.

Machines fitted to cold water supply will not be capable of running repeated short cycles. The cycle time will automatically be extended to allow for recovery of correct operating temperatures.

Model	Rack size mm	Useable Height mm	Dimensions mm W x D x H	Cycle Options	Power kW	Amps Required
Evolution 2135 WS HR	500	440	640 x 755 x 2235*	3 Cycles	4.7/6.7	20/30**

Height adjustable from 2235 to 2295mm.

Machines will be supplied for 30 amp supply as standard, if 20 amp required specify at time of order.