



BBS1850-GD



BBS900-GD

Precision's Back Bar Storage cabinets combine great looks with the latest, hassle free energy saving refrigeration technology. These cabinets make a stylish addition to any bar concept with numerous exterior finishes, as well as door and handle options, to compliment any interior decor.

These back bar fridges are a high impact sales tool as well as being a solid, reliable piece of equipment with robust 32°C ambient refrigeration systems. A matching 600mm wide Glass Froster is also available within this product range.

Key Features:

Stainless Steel Exterior

Mirrored Stainless Steel Interior

Front Breathing & Venting Refrigeration System

Glass Doors As Standard

LED Lighting

Adjustable Perforated Stainless Steel Shelves

R134a Refrigerant

40mm Zero ODP Polyurethane Insulation

+3/15°C Refrigerator Temperature Range

Electronic Controller With LED Display Discreetly Positioned Inside The Cabinet For Ease Of Access

Door Locks Fitted As Standard

Rifle Bore Coated Evaporators

Stylish "Hidden" Door Handle

Hi / Lo Audio Visual Temperature Alarms

Maintenance Free Condenser

Levelling Feet

Waste Heat Recovery Condensate Vaporiser System



BBS1350-SD

Options:

Solid Doors

Sliding Glass Doors +30mm Depth

Sliding Solid Doors +30mm Depth

Coloured Plastisol Steel Door and Grill

Coloured "Rimex" Steel Door and Grill

Painted Door and Grill (To Any RAL Number)

845mm Height

800mm Height

Wooden Door Options - Consult Factory

Exterior Cladding - Consult Factory


43°C Ambient "Tropicalised" Version - TBBS

Precision Connect

Distributor:

KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP
Tel: 0333 123 2450

sales@kidcateringequipment.com

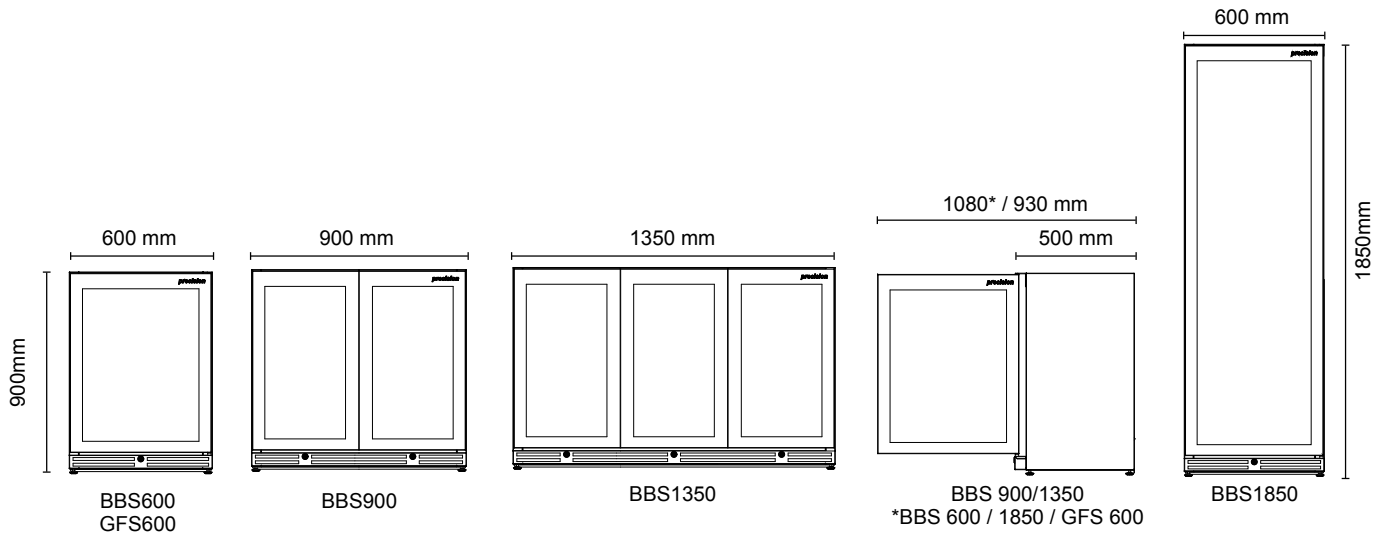

Model	BBS600	BBS900	BBS1350	BBS1850	GFS600
Type	Bottle Cooler	Bottle Cooler	Bottle Cooler	Bottle Cooler	Glass Froster
Material	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext	ST/ST Int/Ext
Shelf Size (mm)	350x502	311x400	311x400 and 311x450	350x502	350x502
Number of Shelves	2	4	6	4	2
Capacity (330cl Bottles)	126	196	296	251	N/A
Temperature Range	+3 / +15°C	+3 / +15°C	+3 / +15°C	+3 / +15°C	-10 / -22°C
Exterior WxDxH (mm)	600x500x900	900x500x900	1350x500x900	600x500x1850	600x500x900
Weight (KG)	55	71	95	95	55
Refrigerant / GWP	R134a / 1430	R134a / 1430	R134a / 1430	R134a / 1430	R290 / 3
Refrigeration Watts (+45°C Condensing)	401	401	401	401	208
Evaporating Temp	-5°C	-5°C	-5°C	-5°C	-30°C
Heat Rejection Watts*	607	613	620	613	438
Noise Output (dBA)	55	56	58	58	58
Power	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1	230 / 50 / 1
Running Amps	1.5	1.5	1.5	1.5	1.5
Total Electrical Load - kW	0.35	0.35	0.35	0.35	0.35
Energy Consumption / 24hrs - kWh**	N/A	N/A	N/A	N/A	N/A
Energy Consumption / Year (AEC) - kWh**	N/A	N/A	N/A	N/A	N/A
Energy Efficiency Class**	N/A	N/A	N/A	N/A	N/A

* Heat Rejection is taken at the listed evaporating and condensing condition. Watts is calculated by taking the total power of the cabinet.

** Tested to EN16825

We are constantly innovating and improving our products. Please always check our website for the most up-to-date version of this spec sheet