

AF 80 *XSafe*


Scotsman
Ice Systems

Self Contained Ice Machine 70 kg

Item #:

Project:

Quantity:

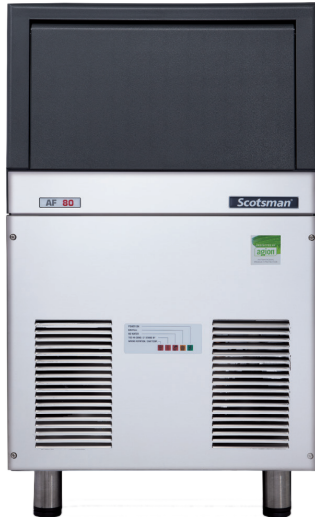

FEATURES

- Produces granular shape ice flakes, 75% hardness
- Electronically controlled operation, with self-diagnostic functions with external alarm lights providing operational information for early alert and fast diagnosis of operating issues
- External Components constructed from corrosion-resistant stainless steel crafted for optimal aesthetic appeal through superior fit and finish
- Ergonomically convenient, slanted & disappearing storage bin door
- Front access for easier maintenance
- Front-in, front-out airflow allows for built-in installations
- Also available as AF80 LAB: specifically designed to be used with demineralized and distilled water. Already fitted with Shuko plug.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



AF 80
Flake ice
Residual water content 25%

CONDENSING SYSTEM

Air cooled
Water cooled

REFRIGERANT GAS

R134a

VOLTAGE V/Hz/ph

230/50/1
230/60/1

INTERNAL BIN CAPACITY

25 kg

CERTIFICATION



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	43
Water temperature	5	38
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Distributor:
KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness,
Cheshire, CH64 8TP
Tel: 0333 123 2450
sales@kidcateringequipment.com


Self Contained Ice Machine 70 kg

27 October 2020

AF 80 XSafe

Self Contained Ice Machine 70 kg

Item #:
Project:
Quantity:

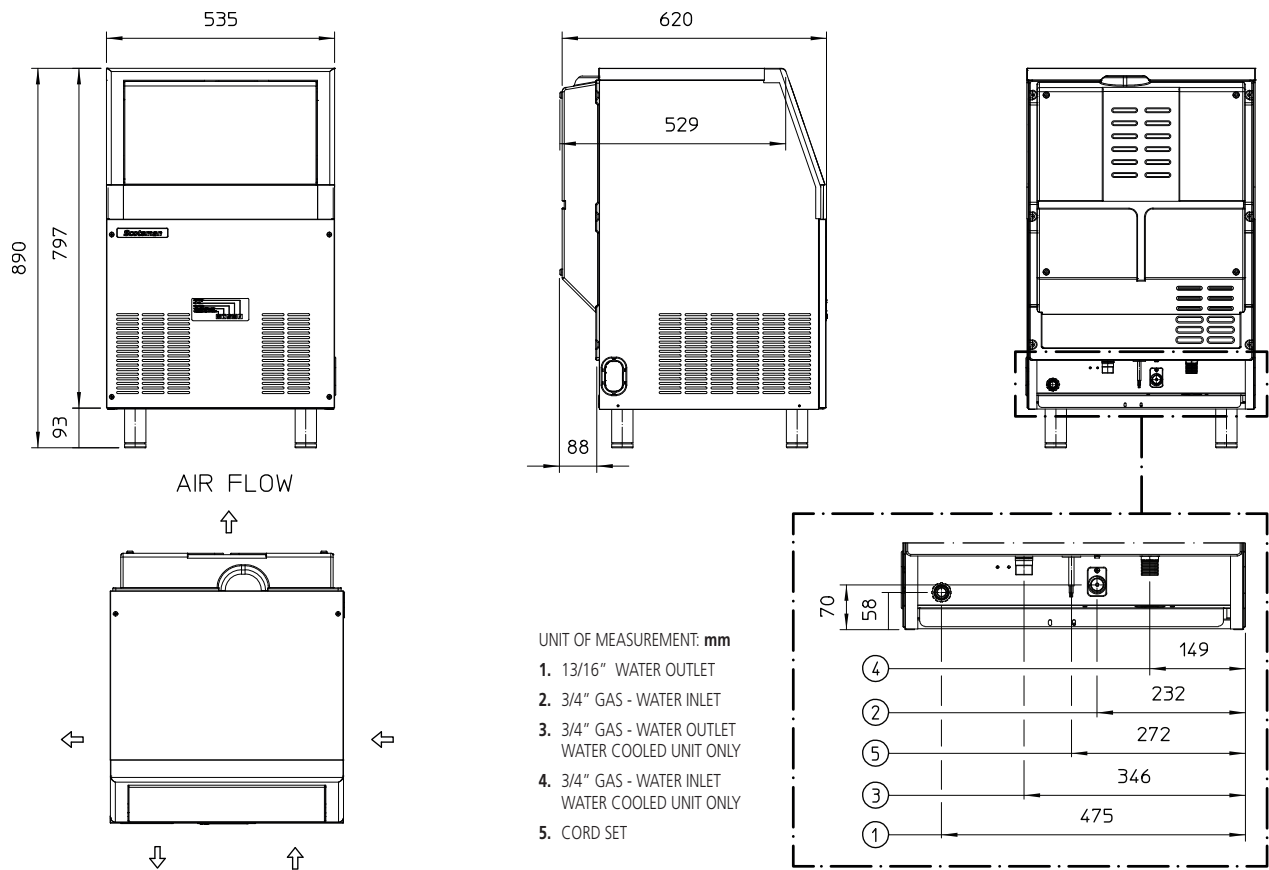

UNIT DATA					SHIPPING DATA						
Size (W x D x H)		535 x 620 x 890 mm			Carton (W x D x H)		600 x 690 x 980 mm				
Net weight		50 kg			Weight		58 kg				
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C kg	21°C/10°C kg	32°C/21°C kg	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
AF 80 AS	230/50/1	70	67	53	13.0	6.9	2.2	340	790	3 x 1.5	10
AF 80 WS	230/50/1	73	66	56	12.5	7.0	17.1	300	780	3 x 1.5	10
AF 80 AS	230/60/1	70	67	53	13.0	6.9	2.2	340	900	3 x 1.5	10
AF 80 WS	230/60/1	73	66	56	12.5	7.0	17.1	300	900	3 x 1.5	10

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

Distributor:
KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP
Tel: 0333 123 2450
sales@kidcateringequipment.com