

EVOX FT 5 TRAYS COMPACT


Standard features:

Plug-in with air condensation, R452A unit

Hinges on the right, non-reversible door

Drain on the bottom, standard drip tray included

Blast Chilling

12 kg

+90°C → +3°C
90 min

Deep Freezing

7 kg

+90°C → -18°C
240 min

Capacity

**5 GN1/1
(5 GN2/3)**

CONSUMPTION (prEN 17032)

Blast Chilling	Deep Freezing
+90°C / +3°C	+90°C / -18°C
0,16 kWh/kg	0,66 kWh/kg

REFRIGERANT GAS

Type	GWP	Charge
R452A	2141	0,6 kg

ROOM CONDITIONS

+32°C 60% UR

CERTIFICATION

TECHNICAL DATA

Code	FT5.12C
Version	Air
Dimensions (L x P x H)	655 x 715 x 685/715 mm
Net Weight	65 kg
Insulation Thickness	50 mm
Standard Tension	230 V / 1 Ph / 50 Hz
Power Consumption	0,9 kW / 5,0 A
Refrigeration power (*Te= -10°C)	1.160 W
Refrigeration power (*Te= -30°C)	470 W
Noise	<70 dB
HP	0,75 HP

*Te = Expansion temperature - Condensation temperature = +45°C

SPECIFICATIONS IN COMPLIANCE WITH prEN 17032

Blast Chilling (+65°C / +10°C)		Deep Freezing (+65°C / -18°C)	
Maximum capacity	Time	Maximum capacity	Time
12 kg	120 min	7 kg	260 min

CONTROLLER

								
BLAST CHILLING	DEEP FREEZING	USB	FAN SPEED REGULATION	RECIPE BOOK	COLD HOLDING (TOP)	THAWING -18°C ⇌ +3°C		

TOP - STANDARD


- Automatic cycles and RECIPE BOOK with pre-set programs;
- Blast Chilling + 3°C HARD/SOFT with core probe/time duration + automatic conservation;
- Deep Freezing -18°C HARD/SOFT with core probe/ time duration + automatic holding;
- Fan-speed regulation;
- Cold conservation function;
- Favourites function: quick access to most used programs;
- Special cycle for the raw fish sanitation;
- Non-stop cycle for the ice cream hardening;
- Controlled thawing from -20°C to +3°C;
- Chamber drying to remove humidity.

CONSTRUCTIVE FEATURES


Stainless steel structure AISI 304 18/10, external Scotch-Brite, internal mirror finish; rounded inner and outer angles for a perfect and easy cleaning; space under the evaporator for a perfect cleaning; oversized condenser to ensure reliability; Italian high-performance refrigerating units; special fans suitable for low temperatures with speed regulation system; evaporators with cataphoresis anticorrosion treatment; the technical room of evaporator can be easily inspected.

ACCESSORIES


	Ozone sterilizer ACC 110		

DIMENSIONS


Front View

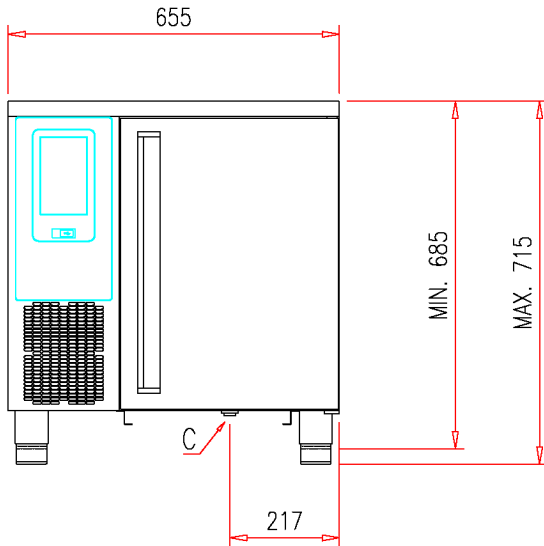

Side View

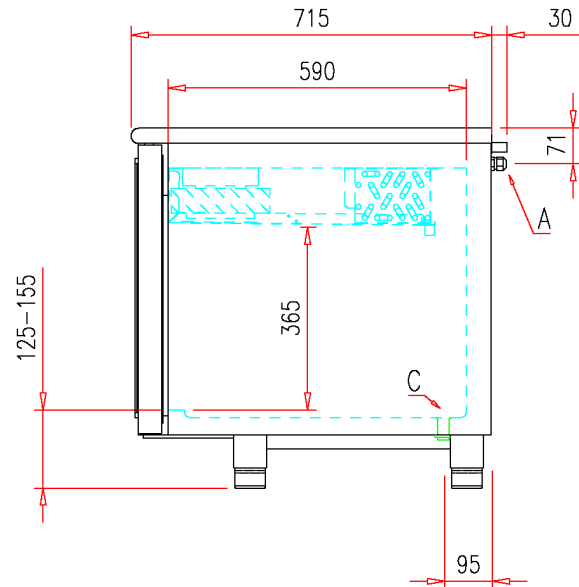

Top View

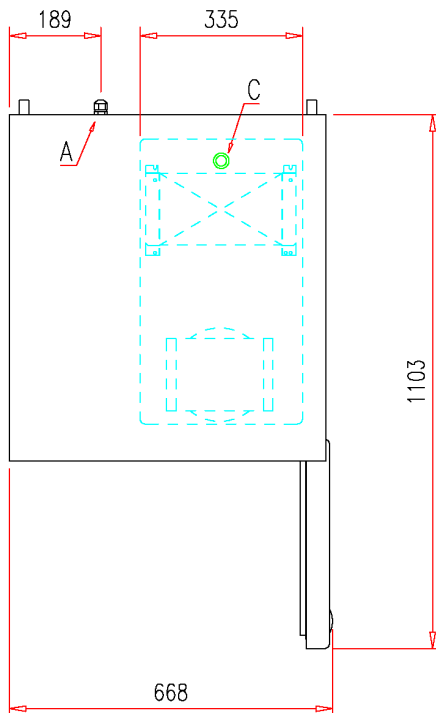

CONNECTIONS

A = Electrical connection
C = Evaporator water drain pipe