

Evolution

pass through

DISHWASHERS

Evolution 2135 WSHR



Maidaid Evolution 2135 WSHR Features

- 2 year warranty
- **HEAT RECOVERY** as standard
- **HEAT RECOVERY** offers up to 25% less power required to heat rinse water
- HR module supplied separately with simple bolt on instructions
- Reduces need for extraction hood and improves working environment
- Polychromatic LCD display and user interface giving uncomplicated machine status updates



- Four button control fascia with special programmes button, operational self-diagnostics & alarms menu
- Quick release parallel wash & rinse arm design
- Stainless steel scrap tray filters supplied as standard
- Tripple wash tank filtration system
- Internal continuous water softener as standard
- Drain pump and breaktank as standard
- Three standard cycle time options with a range of extensive special cycles
- Cycle times can be tailored to site requirements
- Comprehensive automatic self cleaning at end of service
- Selectable energy saving mode
- Selectable thermostop ensures optimum rinse temperatures
- Full double skinned body & hood minimising both acoustic output and reduced heat loss
- Easy lift super glide hood system
- Patented dual flow wash pump – reducing power whilst retaining wash efficiency
- Moulded wash tank for easy cleaning
- Accurate detergent & rinse aid dosing pumps as standard

**EVOLUTION
2135 WSHR**
(shown with tabling –
not included)

Supplied with one pegged
(capable of holding 18 10" plates),
one open rack (capable of
holding 25 pint glasses)
and cutlery insert.

Additional racks can be
purchased



Distributor:

KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP
Tel: 0333 123 2450

sales@kidcateringequipment.com

Evolution

pass through

DISHWASHERS

Evolution 2135 WSHR



EVOLUTION 2135 WSHR

(shown with tabling –
not included)


Technical Data

Dimensions (W x D x H)	mm	640 x 755 x 2035 + Feet
Feet height	mm	165-225
Rack size	mm	500 x 500
Maximum useable height	mm	440
Door opening	mm	460
Theoretical productivity	Racks/h	51
Effective productivity	Racks/h	36*

*Allowing 30 seconds for reloading
Cycle times may vary depending on local conditions/services

Installation Diagram –

All services must be within 1 meter

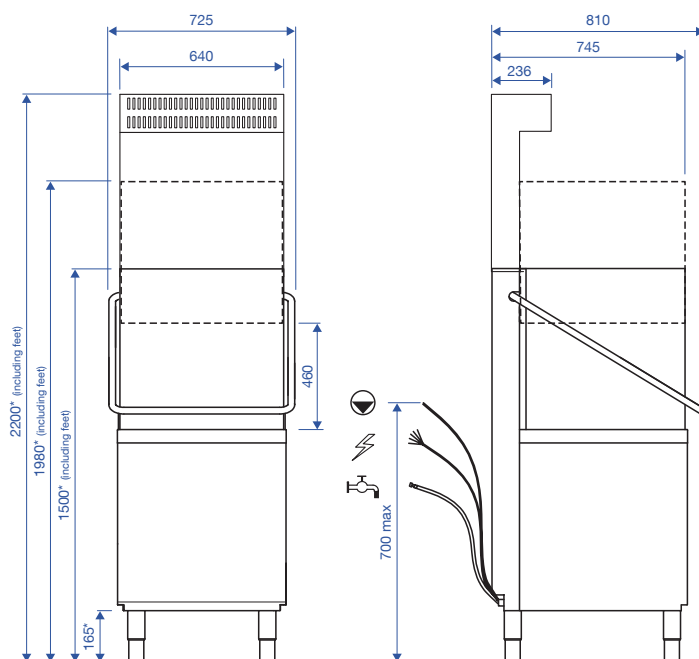

*Height-adjustable feet + 60mm



Wash tank element	kW	2.5
Boiler element	kW	6
Wash pump	kW	0.7
Tank capacity	L	22
Noise emission	dB	≤ 65

Packaging Specs

Evolution 2135 WSHR:

Gross weight	Kg	120
Cubic volume	m³	1.02
Dim. (W x D x H)	mm	870 x 760 x 1540

Heat Recovery module (supplied separately):

Gross weight	Kg	26
Cubic volume	m³	0.18
Dim. (W x D x H)	mm	720 x 760 x 310

Power Supply

Installed power	AMP	kW
230V – 50Hz – 1N	20	4.7
	30*	6.7
Optional 3 Phase config	Total load 6.7kW	
Fused	16 amp	

*Standard configuration

Water Connection

Inlet water pressure	Bar	2 to 4
Flow rate L/Min	L/Min	6
Water inlet temp	°C	10 to 50
Water connection	BSP	¾"
Waste connection	Ø	Int 29/ext 34

Cycle Information

Number of standard cycles	3	
Standard cycles times	Sec	70/90/180
Special cycle	ProSan, ProEco, ProNew, ProLong, ProGlass, ProActive, ProSteel	
Self-cleaning cycle	Full self clean	
Water consumption per cycle	L	2
Wash temperature	°C	60 – adjustable
Rinse temperature	°C	82 – adjustable

Distributor:

KiD Catering Equipment, Oaktree Court Business Centre, Mill Lane, Ness, Cheshire, CH64 8TP
Tel: 0333 123 2450

sales@kidcateringequipment.com